

one

POWERED BY
AQUAPORIN INSIDE®

REPLACEMENT OF CARTRIDGES



There are two cartridges inside ONE;
a PCB filter which is a 2-in-1 filter and works
as both a pre- and post-treatment, as well as
an Aquaporin Inside® DWRO™ membrane.


The PCB filter removes particulate matter and impurities such as chlorine, organic compounds, and heavy metals. Also, it protects the Aquaporin Inside® DWRO™ membrane. As a post-treatment, the filter is considered as a precautionary step to remove bacterial contamination as well as any bad taste or odor and to further polish the purified water.

The Aquaporin Inside® DWRO™ membrane inside ONE filters out up to >99% of all dissolved solids and contaminants in your tap water.

The cartridge replacement intervals are indicative only as the condition is affected by the quality of the source water which may vary.


A light on the front panel will indicate when it is time to change your cartridge.

FILTER NAME	LIFETIME
PCB filter	12 months
Aquaporin Inside® DWRO™ membrane	24 months

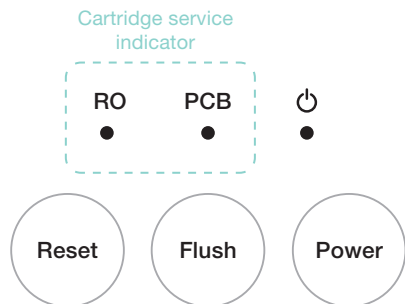


1/10

Close the ball valve.

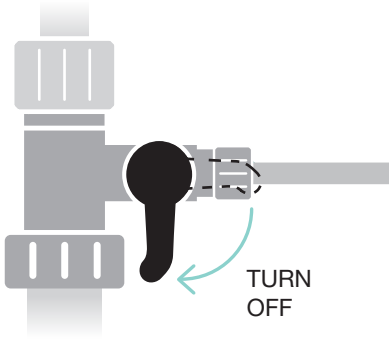


2/10

Unplug the power supply.

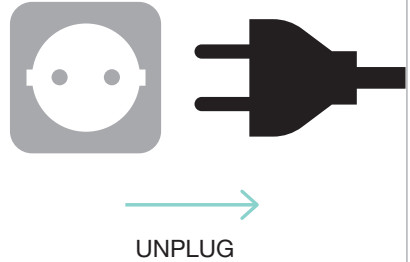


3/10

Find the cartridge that needs to be replaced.

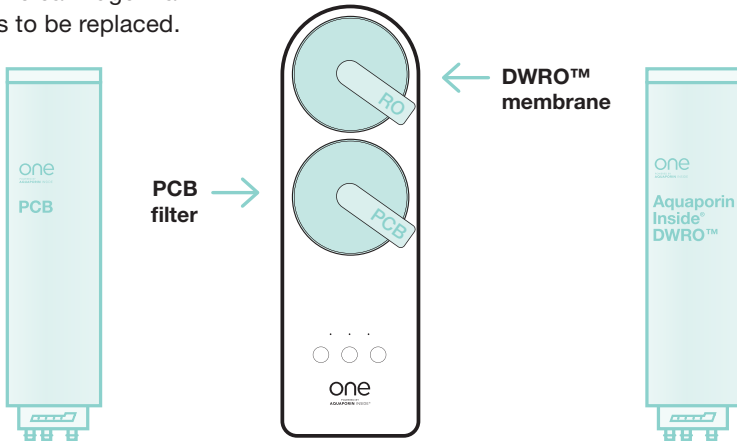


4/10

Open the handle of the rotary cover of the cartridge.

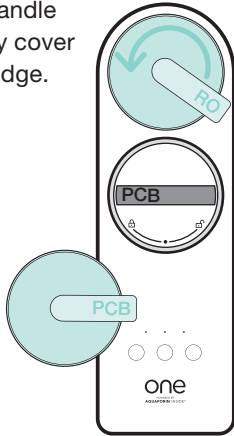

5/10


Take out the cartridge with the filter wrench that came with the machine or use your fingers.

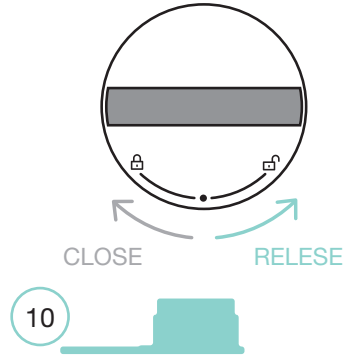

6/10


Take out the cartridge that you are replacing.

Insert the new cartridge and tighten to the mark position. Screw the rotary cover back in and close the handle.

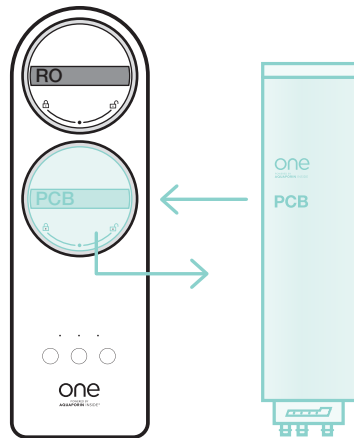


7/10

Once the cartridge has been changed, open the ball valve.

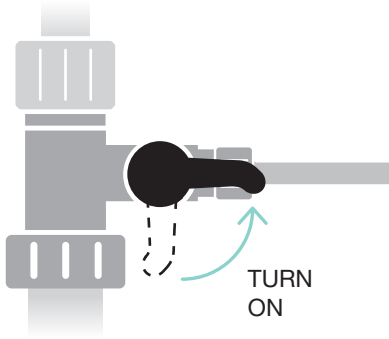


8/9

Plug in the power supply.

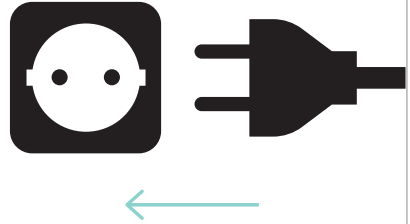

9/10

Hold the Reset button for 3 seconds until the filter indicator stops flashing.



10/10

Remember to flush before consuming the water!

After replacing the PCB filter, open your faucet and let the water flow for 15 minutes. Note that the first coming out will be black. This is totally normal as some of the activated carbon is washed out.

After replacing the DWRO™ membrane, open your faucet and let the water flow for 30 minutes.

one

POWERED BY
AQUAPORIN INSIDE®

Aquaporin A/S
Nymøllevej 78
2800 Kongens Lyngby
Denmark

VAT No.: DK28315694
Tel: +45 82 30 30 82
sales@aquaporin.com

[aquaporin.com](https://www.aquaporin.com)